



Seat Genuine Parts Comfortable Armrest 0-90° For Truck Driver Seat

Our Product Introduction

for more products please visit us on vehicle-seats.com

Basic Information

- Place of Origin: China
- Brand Name: BT
- Certification: ISO9001
- Model Number: BT-FSG01
- Minimum Order Quantity: 2 Pcs
- Price: \$12-\$17
- Packaging Details: 20pcs for a Carton
- Delivery Time: Around 10-15 days
- Payment Terms: T/T
- Supply Ability: 500 Pcs Per Week



Product Specification

- Product Name: Seat Genuine Parts Comfortable Armrest 0-90° For Truck Driver Seat
- Place Of Origin: China
- Product Model: BT-FSG01
- Product Material: Pu
- Product Color: Black
- Angle Adjustment: 0-90°
- Highlight: **seat genuine parts, Comfortable Armrest, Truck Driver Seat**

Product Description

Seat Genuine Parts Comfortable Armrest 0-90° For Truck Driver Seat Main Functions And Basic Parameters of The Seat

Overall Size	Length 385mm* width65mm* height 90mm
Mounting hole spacing	85mm
Material	PU
Colour	Yellow hand wheel
Angle Adjustable	0-90°
Net Weight	1.3kg

Seat Genuine Parts Comfortable Armrest 0-90° For Truck Driver Seat Technical Parameter

- 1: Handrail material is self-skin, with higher resilience and permanence, appearance is more scientific design of human body, more reasonable, more comfortable, reasonable shock absorption structure, good performance.
- 2: The armrest can be adjusted 90 degrees
3. Surface soft and hard moderate, comfortable wear

Seat Genuine Parts Comfortable Armrest 0-90° For Truck Driver Seat Customizable

- 1.Handwheel color options: black, gray, yellow ,It can be made according to your requirements

Seat Genuine Parts Comfortable Armrest 0-90° For Truck Driver Seat Application

This handrail is suitable for construction machinery excavators, railway locomotives, rail cars, all kinds of modified cars, truck driver seats, commercial vehicle modified seats and so on


How to set up

A.No drilling installation

1. Open the back sponge to expose the Frame
2. Fix the support to the frame
3. Sponge cloth cover cut holes to make the support shaft protrude
4. Install the armrest and twist the screws (from the bottom)

B.Drill holes for fixed installation.

- 1.Open the back sponge to expose the Frame
2. Find the height of the drilling fixed support
3. Sponge seat cover cut holes to allow the support shaft to protrude
4. Install the armrest and screw (from the bottom)

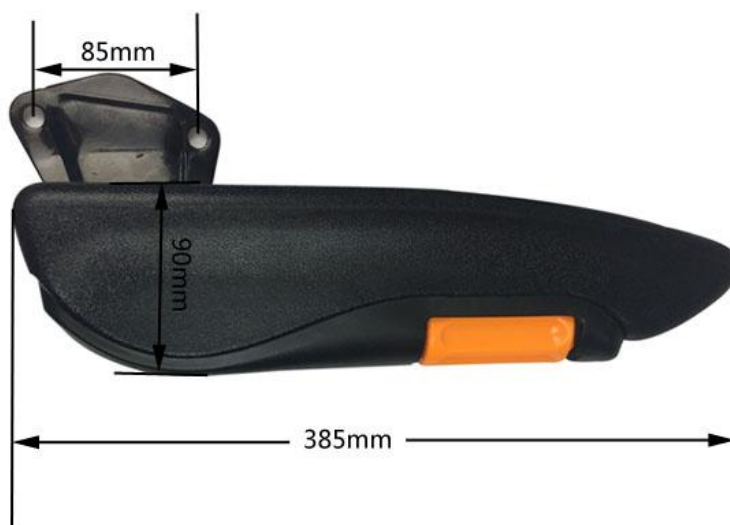

Pay Attention :

The goods are shot in kind, due to the impact of external light, it is inevitable that there are color differences, if you mind the color difference, please carefully consider order



Shaanxi Botai Automobile Accessories Co.,Ltd.



15319910265



41318225@qq.com



vehicle-seats.com

140 meters west of intersection of Sunwu Road and Lane 4, Zhongjie, Weiyang District, Xi 'an, Shaanxi, China