




M801 Mechanical Suspension Damping V-Seat Crane Seat Mine Car Seat

Our Product Introduction

for more products please visit us on vehicle-seats.com


Basic Information

- Place of Origin: Shaanxi China
- Brand Name: Botai
- Certification: ISO9001:2015
- Model Number: M801-21
- Minimum Order Quantity: 2 sets
- Price: \$175~\$278/set
- Packaging Details: Carton
- Delivery Time: 10-15 days
- Payment Terms: T/T
- Supply Ability: 100Set Per Week

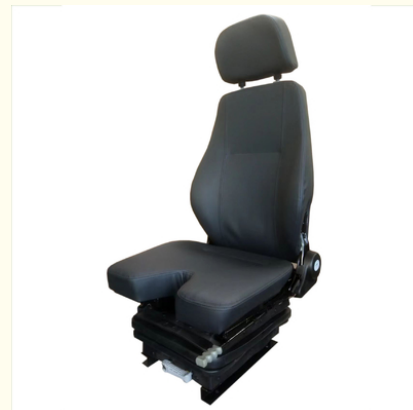

Product Specification

- Product Name: M801 Mechanical Suspension Damping V-Seat Crane Seat Mine Car Seat
- Product Model: M801-21
- Product Size: 500*500*1140-1220mm
- Product Material: PU/Leather/Fabric
- Product Color: Black/Blue/Red/Customized
- Cushion Size: W480*D470*H280-360mm
- Backrest Size: W480*H630mm
- Head Restraint Adjustment: 3 Gears Adjustable, 25mm For Each Gear
- Backrest Adjustment: 40-170°
- Customized: Headrest/handrest/Rotation Base/safety Belt Etc.,
- Highlight: V-Seat Mechanical Suspension Seat, Mine Car Seat Mechanical Suspension Seat, M801 Mechanical Suspension Seat

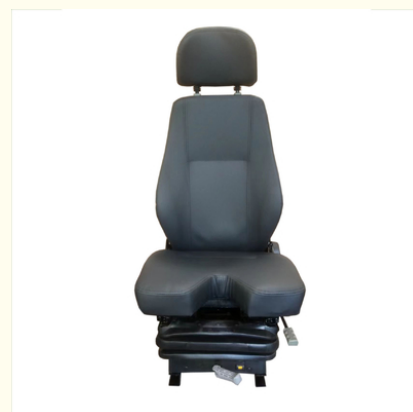

Product Description

M801 Mechanical Suspension Damping V-Seat Crane Seat Mine Car Seat Details

Product Name	M801 Mechanical Suspension Damping V-Seat Crane Seat Mine Car Seat
Place of Origin	Shaanxi China
Product Model	M801-21
Scope Of Application	Universal
Product Size	500*500*1140-1220mm
Product Material	PU/Leather/Fabric
Product Color	Black/Red/Blue/customized
Backrest size	W480*H630mm
Cushion size	W480*D470*H280-360mm
Adjustable Backrest Elevation	40-170°
Horizontal adjustment	Front 70mm, Rear 70mm
Weight Adjustment	40-130kg
Bottom Connecting Hole Spacing	Left And Right 280mm* Front And Rear 280mm Or as your required
Customized	Safety Belt/Armrest/Angle adjuster/Rotation base / High and low adjustment etc.,

M801 Mechanical Suspension Damping V-Seat Crane Seat Mine Car Seat Technical parameter

1. Forming welding frame: Q235 cold-rolled steel sheet, 2.0mm thickness, stamping, CO2 gas shielded welding process
2. Double spring: high strength spring steel, double spring, full of elasticity, absorb bumps and vibrations, release comfortable rebound
3. Damper: Improve frequency response, reduce energy consumption, using special oil pressure and sealing medium, stable performance and long service life
4. After the seat is assembled, the slide adjustment, backrest adjustment, and headrest adjustment should be flexible and reliable, without interference.
5. The outer fabric of the seat should be firmly stitched, the stitching part should not allow the cable head to be exposed, the seam off line and jumper phenomenon, the surface of the seat after assembly should be full and clean, without deformation, discoloration, wrinkling, external leakage, decolorization, stains, damage and scratches.
6. The skeleton and the leakage parts should be treated with rust prevention, in line with the factory requirements, and electroplating and chemical treatment should be in line with the factory
7. Each connection of the seat should be firmly connected and reliable. Each welding component shall not have welding dislocation, welding, welding and other defects.





Shaanxi Botai Automobile Accessories Co.,Ltd.



15319910265



41318225@qq.com



vehicle-seats.com

140 meters west of intersection of Sunwu Road and Lane 4, Zhongjie, Weiyang District, Xi 'an, Shaanxi, China